



837Bxi Delta T 120 kHz Profiling

445-115 DECEMBER 2020-REVISED FEBRUARY 2021

IMAGENEX MODEL 837Bxi "Delta T" 120 kHz 120° x 2.5° MULTIBEAM SONAR

APPLICATIONS:

- ROV, AUV, & UUV
- Offshore Oil & Gas
- Sunken Timber Recovery
- Diving Support
- Surveying
- Search & Recovery
- Inspection
- Underwater Archaeology
- Scientific Research

FEATURES:

- Reprogrammable IP Address
- High speed
- High performance
- Lower cost
- Low power
- Simple set-up and installation
- Ethernet
- 5 m to 100 m range scales
- Integrated Video Capture and Display
- Built in GPS Track Plotter

The Imagenex Model 837Bxi "Delta T" 120 kHz is a high resolution multiple receiver sonar system run from a laptop or industrial PC computer. In this model, the acoustic array is designed to provide detection over a 120° x 2.5° field of view for bottom profiling applications. The 2.5° field of view is also applicable to obstacle avoidance in near-bottom applications where the narrow vertical extent of the beam reduces false obstacle detection. A 120 kHz acoustic frequency has been selected to provide detection up to 300 m range. Image update rates are up to 40 times per second at short range and more than 5 times per second at 100 m range. The stainless steel housing provides a 1000 m depth rating for compatibility with ROV and AUV applications.

The provided software includes innovative digital signal processing to optimize data usage from all channels to achieve the best possible resolution at every point in the field of view. Recent advances in PC computing power have made it possible to transfer this data over a standard 100 Mbps Ethernet connection and process it at resolutions equal to computer monitor resolution. Software is also available to store the data with a low power computer for processing into extremely high resolution images after uploading to a desktop PC.

The Delta T system has been designed from the ground up with the most advanced low power electronic components available to provide breakthroughs in system power consumption and package size. There is no expensive and bulky surface control box, so integration into ROV and AUV systems is simplified, and the cost is significantly less than other systems of similar capabilities.




Imagenex sonars: advancing underwater imaging capability for the everyday user.

Patent Pending

HARDWARE SPECIFICATIONS:	
FREQUENCY	120 kHz
TRANSDUCER BEAM WIDTH (nominal)	Receive: 120° x 2.5° Transmit: 120° x 2.5°
EFFECTIVE BEAM WIDTH	3°, 1.5°, 0.75°
BEAMS*	120, 240, 480
RANGE RESOLUTION: SCREEN OUTPUT	0.2% of range 0.02% of range
MIN. DETECTABLE RANGE	0.5 m
MAX. OPERATING DEPTH	1000 m
FRAME RATE	Up to 40 fps
INTERFACE TO PC	Ethernet (100 Mbps) using TCP/IP
MAX. CABLE LENGTH	100 m on CAT5e (Longer cable runs possible with additional hardware)
CONNECTOR	End mounted, 8 conductor, wet mateable (Subconn MCBH8M-AS or MCBH8M-SS)
POWER SUPPLY	20 – 50 VDC at less than 10 Watts
DIMENSIONS	See drawing
WEIGHT: In Air	Stainless Steel: ~21 kg (~46 lbs) Aluminum: ~11.4 kg (~25 lbs)
In Water	Stainless Steel: TBA Aluminum: ~6.8 kg (~15 lbs)
MATERIALS	Aluminum unit: 6061-T6 Aluminum, Epoxy, PVC, Aluminum connector Stainless Steel unit: 316 Stainless Steel, Epoxy, PVC, Stainless Steel connector
FINISH	Hard Anodize (Aluminum unit only)

*Data is acquired at full resolution every shot: processing the data for screen display on a PC can slow the system at highest number of beams. 120 beam mode is recommended for real time data acquisition. The data can then be played back at highest resolution (480 beam).

SOFTWARE SPECIFICATIONS:	DeltaT_Xi.exe
WINDOWS™ OPERATING SYSTEM	Windows™ XP, Vista, 7, 8, 10
DISPLAY MODES	Sector, Linear, Perspective, Profile, Beam Test
PERSISTENCE (TRAIL)	1 – 300 seconds
RANGE SCALES	5 m, 10 m, 20 m, 30 m, 40 m, 50 m, 60 m, 80 m, 100 m, 150 m, 200 m, 250 m, 300 m
SECTOR SIZES	30°, 60°, 90°, 120°
FILE FORMAT: RAW DATA PROFILE POINT	(filename).IGX (filename).83P
RECOMMENDED MINIMUM COMPUTER REQUIREMENTS:	2 GHz Pentium 4 256 MB RAM 20 GB Hard Disk 1024 x 768 screen resolution

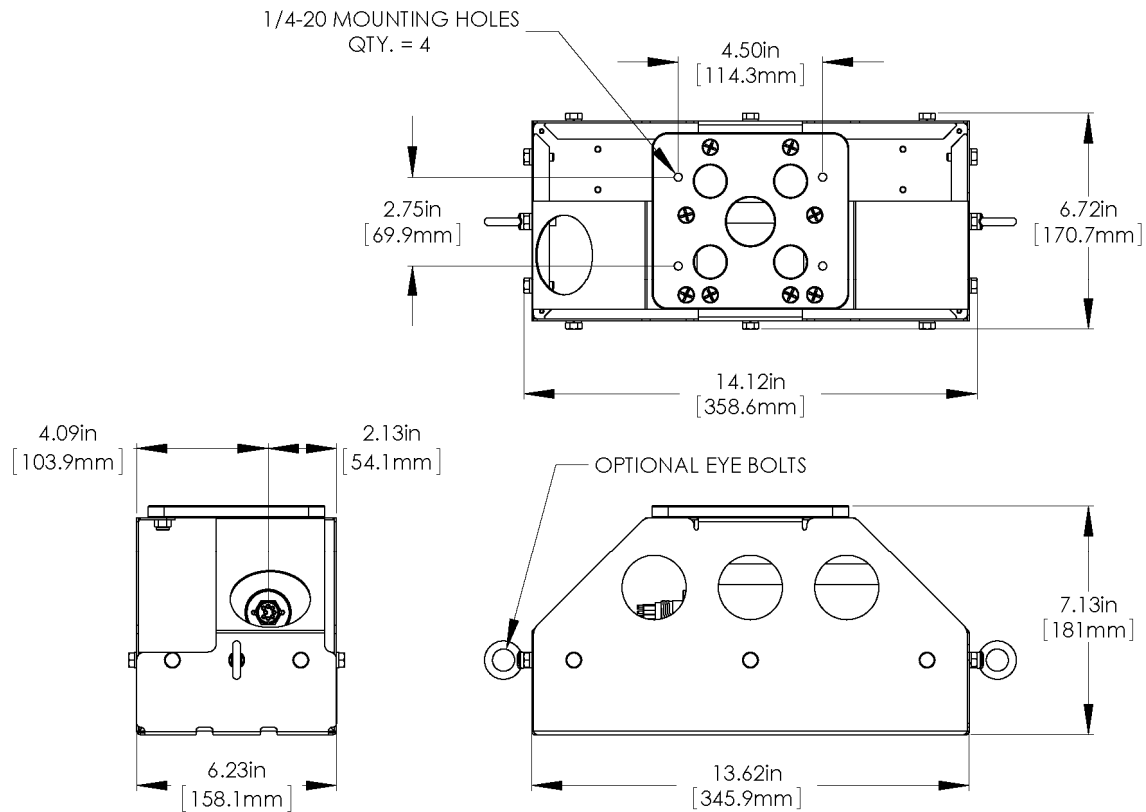

ORDERING INFORMATION:		
1000 m UNIT in Stainless Steel	Standard	837B-000-445
1000 m UNIT in Aluminum	Standard	837B-000-447
IP Address*	Option	-020
External Trigger	Option	-023
Pitch, Roll, & Heading Sensor	Option	-029
Xi	Option (included)	-055

*Note: Standard IP Address is 192.168.0.2
 A different IP Address may be specified upon ordering.
 IP Address can be reprogrammed in the field.

Product and company names listed are trademarks or trade names of their respective companies.